

Specifications

| Tempo Integra | | 402 | 502 | 602 |
|-------------------------------|----------|--------------------|--------------------|--------------------|
| Nominal Impedance | | 4 ohm | 4 ohm | 4 ohm |
| Power Handling | | 60W | 100W | 110W |
| Max. Transient Power Handling | | 140W | 220W | 220W |
| Sensitivity (2.83V/1M) | | 85db | 89db | 90db |
| Frequency Response | | 80-22000Hz | 55-22000Hz | 50-22000Hz |
| Voice Coil Diameter | Woofers: | 32 mm (1.30") | 38 mm (1.50") | 38 mm (1.50") |
| | Tweeter: | 19 mm (1.00") | 25 mm (1.00") | 25 mm (1.00") |
| Voice Coil Wire | Woofers: | Copper | Copper | Copper |
| | Tweeter: | Copper | Copper | Copper |
| Magnet System | Woofers: | high-grade ferrite | high-grade ferrite | high-grade ferrite |
| | Tweeter: | Neodymium | Neodymium | Neodymium |
| Mounting Depth | | 57 mm (2.25") | 57 mm (2.25") | 64 mm (2.52") |

| Tempo Integra | | 572 | 692 |
|-------------------------------|----------|--------------------|--------------------|
| Nominal Impedance | | 4 ohm | 4 ohm |
| Power Handling | | 100W | 140W |
| Max. Transient Power Handling | | 220W | 250W |
| Sensitivity (2.83V/1M) | | 90db | 92db |
| Frequency Response | | 60-22000Hz | 35-22000Hz |
| Voice Coil Diameter | Woofers: | 38 mm (1.50") | 38 mm (1.50") |
| | Tweeter: | 25 mm (1.00") | 25 mm (1.00") |
| Voice Coil Wire | Woofers: | Copper | Copper |
| | Tweeter: | Copper | Copper |
| Magnet System | Woofers: | high-grade ferrite | high-grade ferrite |
| | Tweeter: | Neodymium | Neodymium |
| Mounting Depth | | 62 mm (2.45") | 85 mm (3.35") |



www.morelhifi.com

TempoUltra
INTEGRA


402 / 502 / 602 / 572 / 692

Installation Instructions




www.morelhifi.com


Content - 4" / 5 1/4" / 6 1/2"

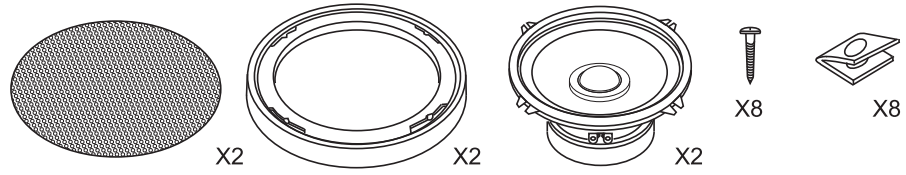

Content - 6x9" / 5x7"

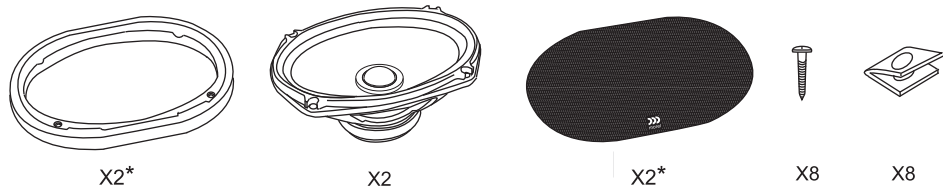


Woofer Mounting

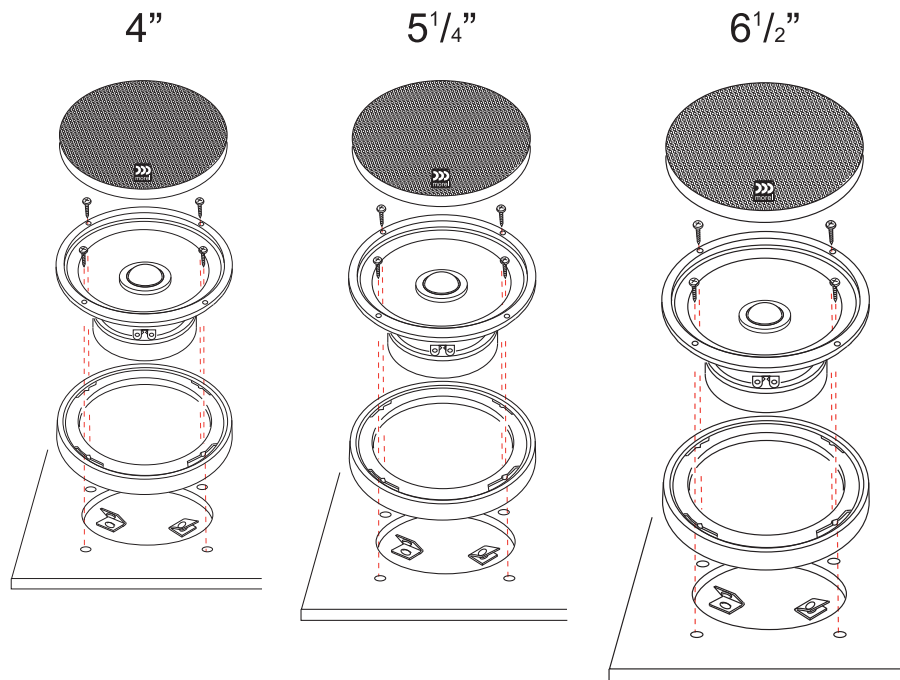

*Grills purchased separately

Woofer Mounting

6x9" / 5x7"

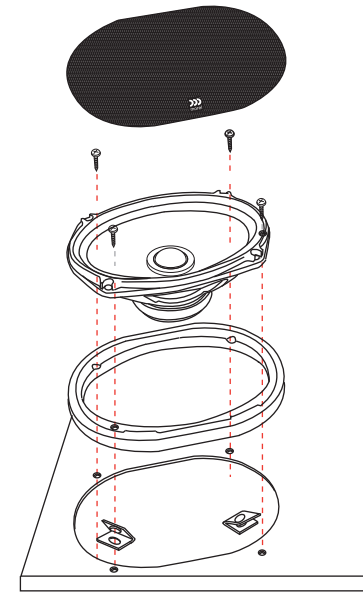

Connection Diagram

Amplifier/Head unit

